




ENERG

енергия · ενεργεια


Y IJA
IE IA

tecalor

TTC 07

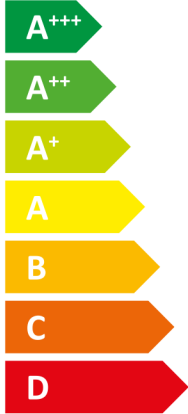

A++

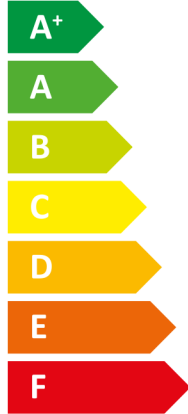

A

Icon of a house with sound waves and the text **48dB**. Below it is another icon of a house with sound waves.



Legend for power consumption in kW, shown as colored squares: dark blue for 9 kW, medium blue for 7 kW, and light blue for 7 kW.

2019

811/2013

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		TTC 07
		190347
Manufacturer		tecalor
Load profile		XL
Space heating energy efficiency class under average climate conditions, medium-temperature applications		A++
Energy efficiency class, space heating under average climate conditions, low-temperature applications		A+++
Energy efficiency class, DHW heating under average climate conditions		A
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	7
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	8
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	3891
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	2912
Annual power consumption under average climate conditions (AEC)	kWh/a	1458
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	139
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s)	%	205
Energy efficiency, DHW heating (η_{wh}), under average climate conditions	%	116
Sound power level, indoor	dB(A)	48
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	9
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	9
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	7
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	8
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	5638
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	4184
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	2527
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	1888
Annual power consumption under colder climate conditions (AEC)	kWh/a	1458
Annual power consumption under warmer climate conditions (AEC)	kWh/a	1458
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η_s)	%	144
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications (η_s)	%	211
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η_s)	%	138
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	204



ENERG
енергия · ενέργεια



TTC 07

tecalor

Energy label for a radiator. The top part shows a radiator icon with an A++ rating arrow. The bottom part shows a radiator icon with an A rating arrow and an XL icon.

Energy label for a radiator. It features a radiator icon at the top left, a vertical bar chart with ratings A+++ to G, and a large A++ rating arrow on the right.

A vertical list of feature icons, each with a plus sign to its left and a square box to its right:

- Solar panel icon with a sun and a square box.
- Water tank icon with a square box.
- Control panel icon with a hand pointing and a square box containing an 'X'.
- Radiator icon with a square box.

Energy label for a tap. It features a tap icon with an XL label at the top left, a vertical bar chart with ratings A+++ to G, and a large A rating arrow on the right.

		TTC 07
		190347
Manufacturer		tecalor
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	139
Temperature control class		VII
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	143
Space heating energy efficiency of package under colder climate conditions	%	148
Space heating energy efficiency of package under warmer climate conditions	%	142
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	5
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	1
Space heating energy efficiency class under average climate conditions, medium-temperature applications		A++
Space heating energy efficiency class of package under average climate conditions		A++
Energy efficiency class, DHW heating under average climate conditions		A
Load profile		XL

		TTC 07
		190347
Manufacturer		tecalor
With auxiliary heater		x
Combination heater with heat pump		x
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	9
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	7
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	7
Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	7,2
Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	7,0
Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	7,3
Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	7,2
Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	6,9
Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	7,4
Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	7,3
Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	7,1
Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	7,5
Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	7,4
Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	7,3
Tj = dual mode temperature under colder climate conditions (Pdh)	kW	7,1
Tj = dual mode temperature under average climate conditions (Pdh)	kW	6,9
Tj = dual mode temperature under warmer climate conditions (Pdh)	kW	6,9
Tj = operating temperature limit under colder climate conditions (Pdh)	kW	6,9
Tj = operating temperature limit under average climate conditions (Pdh)	kW	6,9
Tj = operating temperature limit under warmer climate conditions (Pdh)	kW	6,9
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	6,9
Dual mode temperature under colder climate conditions (Tbiv)	°C	-15
Dual mode temperature under average climate conditions (Tbiv)	°C	-10
Dual mode temperature under warmer climate conditions (Tbiv)	°C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)	%	144
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs)	%	139
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)	%	138
Tj = -7 °C COP, partial load range under colder climate conditions (COPd)		3,59
Tj = -7 °C COP, partial load range under average climate conditions (COPd)		3,07
Tj = 2 °C COP, partial load range under colder climate conditions (COPd)		4,01
Tj = 2 °C COP, partial load range under average climate conditions (COPd)		3,61
Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)		2,94
Tj = 7 °C COP, partial load range under colder climate conditions (COPd)		4,41
Tj = 7 °C COP, partial load range under average climate conditions (COPd)		4,02
Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)		3,35
Tj = 12 °C COP, partial load range under colder climate conditions (COPd)		4,75
Tj = 12 °C COP, partial load range under average climate conditions (COPd)		452,00
Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)		4,18
Tj = dual mode temperature under colder climate conditions (COPd)		3,36
Tj = dual mode temperature under average climate conditions (COPd)		2,94
Tj = dual mode temperature under warmer climate conditions (COPd)		2,94
Tj = operating temperature limit under colder climate conditions (COPd)		2,94
Tj = operating temperature limit under average climate conditions (COPd)		2,94
Tj = operating temperature limit under warmer climate conditions (COPd)		2,94
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		2,94
Operating temperature limit of heating water under average climate conditions (WTOL)	°C	65
Power consumption, off-mode (Poff)	W	0
Power consumption, thermostat off-mode (PTO)	W	54
Power consumption, standby state (PSB)	W	9
Power consumption, operating state, with crankcase heating (PCK)	W	0
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	0,0
Type of energy supply, auxiliary heater		elektrisch

Output control		fest
Sound power level, indoor	dB(A)	48
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	5638
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	3891
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	2527
Flow rate on heat source side	m ³ /h	182
Load profile		XL
Daily power consumption under colder climate conditions (QELEC)	kWh	6,680
Daily power consumption under average climate conditions (QELEC)	kWh	6,680
Daily power consumption under warmer climate conditions (QELEC)	kWh	6,680
Annual power consumption under colder climate conditions (AEC)	kWh/a	1458
Annual power consumption under average climate conditions (AEC)	kWh/a	1458
Annual power consumption under warmer climate conditions (AEC)	kWh/a	1458
Energy efficiency, DHW heating (η_{wh}), under average climate conditions	%	116