



ENERGY

tecalor

TTC 05 cool



A+++

A++

A+

A

B

C

D

A++

A+

A

B


C

D

E

F

A

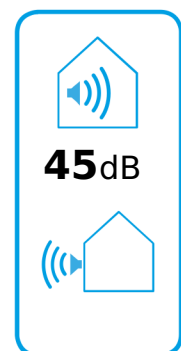

7 kW

5 kW

5 kW

2019

811/2013

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

| | | TTC 05 cool |
|--|-------|--------------------|
| | | 190351 |
| Manufacturer | | tecalor |
| Load profile | | XL |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications | | A++ |
| Energy efficiency class, space heating under average climate conditions, low-temperature applications | | A+++ |
| Energy efficiency class, DHW heating under average climate conditions | | A |
| Rated heating output under average climate conditions for medium-temperature applications (P rated) | kW | 5 |
| Rated heating output under average climate conditions for low-temperature applications (P rated) | kW | 6 |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE) | kWh/a | 3017 |
| Annual energy consumption under average climate conditions for low-temperature applications (QHE) | kWh/a | 2262 |
| Annual power consumption under average climate conditions (AEC) | kWh/a | 1393 |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s) | % | 134 |
| Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s) | % | 205 |
| Energy efficiency, DHW heating (η_{wh}), under average climate conditions | % | 121 |
| Sound power level, indoor | dB(A) | 45 |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated) | kW | 7 |
| Rated heating output under colder climate conditions for low-temperature applications (P rated) | kW | 7 |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated) | kW | 5 |
| Rated heating output under warmer climate conditions for low-temperature applications (P rated) | kW | 6 |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE) | kWh/a | 4398 |
| Annual energy consumption under colder climate conditions for low-temperature applications (QHE) | kWh/a | 3254 |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE) | kWh/a | 1967 |
| Annual energy consumption under warmer climate conditions for low-temperature applications (QHE) | kWh/a | 1473 |
| Annual power consumption under colder climate conditions (AEC) | kWh/a | 1393 |
| Annual power consumption under warmer climate conditions (AEC) | kWh/a | 1393 |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η_s) | % | 140 |
| Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications (η_s) | % | 212 |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η_s) | % | 133 |
| Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s) | % | 203 |



ENERGY

tecalor

TTC 05 cool



A⁺⁺



A



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D


E

F

G

A⁺⁺

+



+



+



+



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

A

| | | TTC 05 cool |
|---|---|-------------|
| | | 190351 |
| Manufacturer | | tecalor |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s) | % | 134 |
| Temperature control class | | VII |
| Contribution of temperature control to space heating energy efficiency | % | 4 |
| Space heating energy efficiency of package under average climate conditions | % | 138 |
| Space heating energy efficiency of package under colder climate conditions | % | 144 |
| Space heating energy efficiency of package under warmer climate conditions | % | 137 |
| Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions | % | 6 |
| Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions | % | 1 |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications | | A++ |
| Space heating energy efficiency class of package under average climate conditions | | A++ |
| Energy efficiency class, DHW heating under average climate conditions | | A |
| Load profile | | XL |

| | | TTC 05 cool |
|--|----|-------------|
| | | 190351 |
| Manufacturer | | tecalor |
| With auxiliary heater | | x |
| Combination heater with heat pump | | x |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated) | kW | 7 |
| Rated heating output under average climate conditions for medium-temperature applications (P rated) | kW | 5 |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated) | kW | 5 |
| Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh) | kW | 5,5 |
| Tj = -7 °C heating output, partial load range under average climate conditions (Pdh) | kW | 5,3 |
| Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh) | kW | 5,6 |
| Tj = 2 °C heating output, partial load range under average climate conditions (Pdh) | kW | 5,5 |
| Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh) | kW | 5,2 |
| Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh) | kW | 5,7 |
| Tj = 7 °C heating output, partial load range under average climate conditions (Pdh) | kW | 5,6 |
| Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh) | kW | 5,4 |
| Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh) | kW | 5,8 |
| Tj = 12 °C heating output, partial load range under average climate conditions (Pdh) | kW | 5,7 |
| Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh) | kW | 5,6 |
| Tj = dual mode temperature under colder climate conditions (Pdh) | kW | 5,4 |
| Tj = dual mode temperature under average climate conditions (Pdh) | kW | 5,2 |
| Tj = dual mode temperature under warmer climate conditions (Pdh) | kW | 5,2 |
| Tj = operating temperature limit under colder climate conditions (Pdh) | kW | 5,2 |
| Tj = operating temperature limit under average climate conditions (Pdh) | kW | 5,2 |
| Tj = operating temperature limit under warmer climate conditions (Pdh) | kW | 5,2 |
| For air source heat pumps: Tj = -15 °C (if TOL< -20 °C) (Pdh) | kW | 5,2 |
| Dual mode temperature under colder climate conditions (Tbiv) | °C | -15 |
| Dual mode temperature under average climate conditions (Tbiv) | °C | -10 |
| Dual mode temperature under warmer climate conditions (Tbiv) | °C | 2 |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs) | % | 140 |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs) | % | 134 |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs) | % | 133 |
| Tj = -7 °C COP, partial load range under colder climate conditions (COPd) | | 3,48 |
| Tj = -7 °C COP, partial load range under average climate conditions (COPd) | | 2,94 |
| Tj = 2 °C COP, partial load range under colder climate conditions (COPd) | | 3,92 |
| Tj = 2 °C COP, partial load range under average climate conditions (COPd) | | 3,49 |
| Tj = 2 °C COP, partial load range under warmer climate conditions (COPd) | | 2,81 |
| Tj = 7 °C COP, partial load range under colder climate conditions (COPd) | | 4,33 |
| Tj = 7 °C COP, partial load range under average climate conditions (COPd) | | 3,92 |
| Tj = 7 °C COP, partial load range under warmer climate conditions (COPd) | | 3,23 |
| Tj = 12 °C COP, partial load range under colder climate conditions (COPd) | | 4,68 |
| Tj = 12 °C COP, partial load range under average climate conditions (COPd) | | 444,00 |
| Tj = 12 °C COP, partial load range under warmer climate conditions (COPd) | | 4,08 |
| Tj = dual mode temperature under colder climate conditions (COPd) | | 3,24 |
| Tj = dual mode temperature under average climate conditions (COPd) | | 2,81 |
| Tj = dual mode temperature under warmer climate conditions (COPd) | | 2,81 |
| Tj = operating temperature limit under colder climate conditions (COPd) | | 2,81 |
| Tj = operating temperature limit under average climate conditions (COPd) | | 2,81 |
| Tj = operating temperature limit under warmer climate conditions (COPd) | | 2,81 |
| For air source heat pumps: Tj = -15 °C (if TOL< -20 °C) (COPd) | | 2,81 |
| Operating temperature limit of heating water under average climate conditions (WTOL) | °C | 65 |
| Power consumption, off-mode (Poff) | W | 0 |
| Power consumption, thermostat off-mode (PTO) | W | 54 |
| Power consumption, standby state (PSB) | W | 9 |
| Power consumption, operating state, with crankcase heating (PCK) | W | 0 |
| Rated heating output of auxiliary heater under average climate conditions (PSUP) | kW | 0,0 |
| Type of energy supply, auxiliary heater | | elektrisch |

| | | |
|--|-------|-------|
| Output control | | fest |
| Sound power level, indoor | dB(A) | 45 |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE) | kWh/a | 4398 |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE) | kWh/a | 3017 |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE) | kWh/a | 1967 |
| Flow rate on heat source side | m³/h | 141 |
| Load profile | | XL |
| Daily power consumption under colder climate conditions (QELEC) | kWh | 6,390 |
| Daily power consumption under average climate conditions (QELEC) | kWh | 6,390 |
| Daily power consumption under warmer climate conditions (QELEC) | kWh | 6,390 |
| Annual power consumption under colder climate conditions (AEC) | kWh/a | 1393 |
| Annual power consumption under average climate conditions (AEC) | kWh/a | 1393 |
| Annual power consumption under warmer climate conditions (AEC) | kWh/a | 1393 |
| Energy efficiency, DHW heating (η_{wh}), under average climate conditions | % | 121 |