





# ENERGY

## tecalor



TTC 8.6

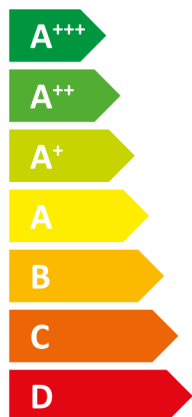

**A+++**

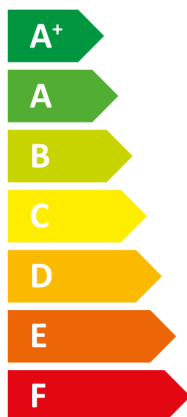

**A**

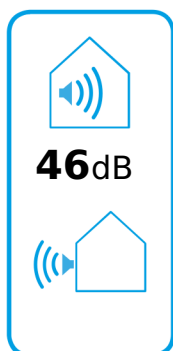

2019

811/2013

**Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

|  |       | <b>TTC 8.6</b> |
|--|-------|----------------|
|  |       | 190612         |
| Manufacturer   |       | tecalor        |
| Load profile   |       | XL             |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications                    |       | A+++           |
| Energy efficiency class, space heating under average climate conditions, low-temperature applications                      |       | A+++           |
| Energy efficiency class, DHW heating under average climate conditions  |       | A              |
| Rated heating output under average climate conditions for medium-temperature applications (P rated)                        | kW    | 7              |
| Rated heating output under average climate conditions for low-temperature applications (P rated)                           | kW    | 8              |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE)                       | kWh/a | 3461           |
| Annual energy consumption under average climate conditions for low-temperature applications (QHE)                          | kWh/a | 3094           |
| Annual power consumption under average climate conditions (AEC)  | kWh   | 1556,000       |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ ) | %     | 158            |
| Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )    | %     | 197            |
| Energy efficiency, DHW heating ( $\eta_{wh}$ ), under average climate conditions   | %     | 108            |
| Sound power level, indoor  | dB(A) | 46             |
| Option for operation only at off-peak times  |       | -              |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated)                         | kW    | 7              |
| Rated heating output under colder climate conditions for low-temperature applications (P rated)                            | kW    | 8              |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated)                         | kW    | 7              |
| Rated heating output under warmer climate conditions for low-temperature applications (P rated)                            | kW    | 8              |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)                        | kWh/a | 3985           |
| Annual energy consumption under colder climate conditions for low-temperature applications (QHE)                           | kWh/a | 3570           |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)                        | kWh/a | 2243           |
| Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)                           | kWh/a | 1997           |
| Annual power consumption under colder climate conditions (AEC)   | kWh   | 1556,000       |
| Annual power consumption under warmer climate conditions (AEC)   | kWh   | 1556,000       |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications ( $\eta_s$ )  | %     | 163            |
| Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 204            |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications ( $\eta_s$ )  | %     | 157            |
| Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 197            |



# ENERGY

tecalor

TTC 8.6



A<sup>+++</sup>



A



A<sup>+++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C

D


E

F

G

A<sup>+++</sup>

+



+



+



+



A<sup>+++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C

D

E

F

G

A

|   |   |         |
|---|---|---------|
|   |   | TTC 8.6 |
|   |   | 190612  |
| Manufacturer  |   | tecalor |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ )              | % | 158     |
| Temperature control class   |   | VII     |
| Contribution of temperature control to space heating energy efficiency  | % | 4       |
| Space heating energy efficiency of package under average climate conditions   | % | 161     |
| Space heating energy efficiency of package under colder climate conditions  | % | 167     |
| Space heating energy efficiency of package under warmer climate conditions  | % | 161     |
| Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions | % | 6       |
| Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions | % | 0       |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications                                 |   | A+++    |
| Space heating energy efficiency class of package under average climate conditions   |   | A+++    |
| Energy efficiency class, DHW heating under average climate conditions   |   | A       |
| Load profile  |   | XL      |

|  |    | TTC 8.6 |
|--|----|---------|
|  |    | 190612  |
| Manufacturer   |    | tecalor |
| Heat source  |    | Sole    |
| Low temperature heat pump  |    | -       |
| With auxiliary heater  |    | x       |
| Combination heater with heat pump  |    | x       |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated)                 | kW | 7       |
| Rated heating output under average climate conditions for medium-temperature applications (P rated)                | kW | 7       |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated)                 | kW | 7       |
| Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)                                | kW | 4,18    |
| Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)                               | kW | 6,1     |
| Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)                                 | kW | 2,5     |
| Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)                                | kW | 3,7     |
| Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)                                 | kW | 6,9     |
| Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)                                 | kW | 1,6     |
| Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)                                | kW | 2,4     |
| Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)                                 | kW | 4,5     |
| Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)                                | kW | 1,1     |
| Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)                               | kW | 1,1     |
| Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)                                | kW | 2,0     |
| Tj = dual mode temperature under colder climate conditions (Pdh)   | kW | 6,9     |
| Tj = dual mode temperature under average climate conditions (Pdh)  | kW | 6,9     |
| Tj = dual mode temperature under warmer climate conditions (Pdh)   | kW | 6,9     |
| Tj = operating temperature limit under colder climate conditions (Pdh)   | kW | 6,9     |
| Tj = operating temperature limit under average climate conditions (Pdh)  | kW | 6,9     |
| Tj = operating temperature limit under warmer climate conditions (Pdh)   | kW | 6,9     |
| Dual mode temperature under colder climate conditions (Tbiv)   | °C | -22     |
| Dual mode temperature under average climate conditions (Tbiv)  | °C | -10     |
| Dual mode temperature under warmer climate conditions (Tbiv)   | °C | 2       |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)  | %  | 163     |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs) | %  | 158     |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)  | %  | 157     |
| Tj = -7 °C COP, partial load range under colder climate conditions (COPd)  |    | 4,07    |
| Tj = -7 °C COP, partial load range under average climate conditions (COPd)   |    | 3,44    |
| Tj = 2 °C COP, partial load range under colder climate conditions (COPd)   |    | 4,60    |
| Tj = 2 °C COP, partial load range under average climate conditions (COPd)  |    | 4,21    |
| Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)   |    | 3,22    |
| Tj = 7 °C COP, partial load range under colder climate conditions (COPd)   |    | 4,90    |
| Tj = 7 °C COP, partial load range under average climate conditions (COPd)  |    | 4,69    |
| Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)   |    | 3,88    |
| Tj = 12 °C COP, partial load range under colder climate conditions (COPd)  |    | 4,75    |
| Tj = 12 °C COP, partial load range under average climate conditions (COPd)   |    | 4,61    |
| Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)  |    | 4,85    |
| Tj = dual mode temperature under colder climate conditions (COPd)  |    | 3,22    |
| Tj = dual mode temperature under average climate conditions (COPd)   |    | 3,22    |
| Tj = dual mode temperature under warmer climate conditions (COPd)  |    | 3,22    |
| Tj = operating temperature limit under colder climate conditions (COPd)  |    | 3,22    |
| Tj = operating temperature limit under average climate conditions (COPd)   |    | 3,22    |
| Tj = operating temperature limit under warmer climate conditions (COPd)  |    | 3,22    |
| Operating temperature limit under colder climate conditions (TOL)  | °C | -22     |
| Operating temperature limit under average climate conditions (TOL)   | °C | -10     |
| Operating temperature limit under warmer climate conditions (TOL)  | °C | 2       |
| Operating temperature limit of heating water under colder climate conditions (WTOL)                                | °C | 75      |
| Operating temperature limit of heating water under average climate conditions (WTOL)                               | °C | 75      |
| Operating temperature limit of heating water under warmer climate conditions (WTOL)                                | °C | 75      |
| Power consumption, off-mode (Poff)   | W  | 16      |

|  |                   |              |
|--|-------------------|--------------|
| Power consumption, thermostat off-mode (PTO)   | W                 | 16           |
| Power consumption, standby state (PSB)   | W                 | 16           |
| Power consumption, operating state, with crankcase heating (PCK)                                     | W                 | 0            |
| Rated heating output of auxiliary heater under colder climate conditions (PSUP)                      | kW                | 0,0          |
| Rated heating output of auxiliary heater under average climate conditions (PSUP)                     | kW                | 0,0          |
| Rated heating output of auxiliary heater under warmer climate conditions (PSUP)                      | kW                | 0,0          |
| Type of energy supply, auxiliary heater  |                   | elektrisch   |
| Output control   |                   | veränderlich |
| Sound power level, indoor  | dB(A)             | 46           |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)  | kWh/a             | 3985         |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE) | kWh/a             | 3461         |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)  | kWh/a             | 2243         |
| Flow rate on heat source side  | m <sup>3</sup> /h | 68           |
| Load profile   |                   | XL           |
| Daily power consumption under colder climate conditions (QELEC)                                      | kWh               | 7,080        |
| Daily power consumption under average climate conditions (QELEC)                                     | kWh               | 7,080        |
| Daily power consumption under warmer climate conditions (QELEC)                                      | kWh               | 7,080        |
| Annual power consumption under colder climate conditions (AEC)                                       | kWh               | 1556,000     |
| Annual power consumption under average climate conditions (AEC)                                      | kWh               | 1556,000     |
| Annual power consumption under warmer climate conditions (AEC)                                       | kWh               | 1556,000     |
| Energy efficiency, DHW heating ( $\eta_{wh}$ ), under average climate conditions                     | %                 | 108          |