




ENERG Y IJA  
енергия · ενεργεια IE IA

tecalor

LTM TL 1230 HL BI

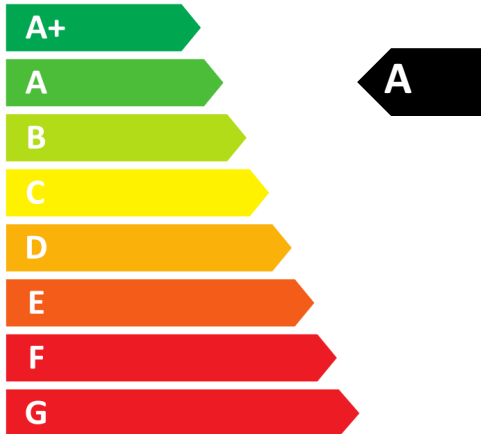

52  
dB

65 m<sup>3</sup>/h

Технические характеристики изделия:


|              |           | LTM TL 1230 HL BI    |
|--------------|-----------|----------------------|
|              |           | 190714               |
| Manufacturer |           | tecalor              |
|              | kWh/(m²a) | -79,28               |
|              | kWh/(m²a) | -34,99               |
|              | kWh/(m²a) | -9,61                |
|              |           | A+                   |
|              |           | A                    |
|              |           | F                    |
|              |           | WLA, Zwei Richtungen |
|              |           | Mehrstufig           |
|              |           | Regenerativ          |
|              | %         | 91,0                 |
|              | m³/h      | 65                   |
|              | W         | 58                   |
|              | dB(A)     | 52                   |
|              | m³/s      | 0,013                |
|              | Pa        | 0                    |
|              | W/(m³/h)  | 0,42                 |
|              |           | 0,85                 |
|              | %         | 4,00                 |
|              | %         | 26 / 26              |
|              | m³/h      | 1,80                 |
|              | kWh/a     | 454                  |
|              | kWh/a     | 454                  |
|              | kWh/a     | 454                  |
|              | kWh/a     | 9062                 |
|              | kWh/a     | 4632                 |
|              | kWh/a     | 2095                 |



**ENERG** Y IJA  
енергия · ενεργεια IE IA

**tecalor**

LTM TL 1230 HL BI

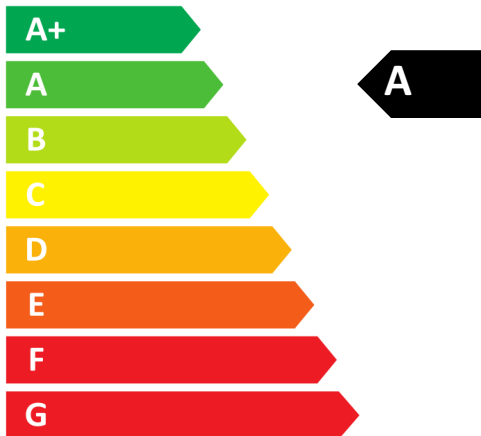

52  
dB

65 m<sup>3</sup>/h

Технические характеристики изделия:

|              |          | LTM TL 1230 HL BI    |
|--------------|----------|----------------------|
|              |          | 190714               |
| Manufacturer |          | tecator              |
|              |          | A                    |
|              |          | WLA, Zwei Richtungen |
|              |          | Mehrstufig           |
|              |          | Regenerativ          |
|              | %        | 91,0                 |
|              | m³/h     | 65                   |
|              | W        | 58                   |
|              | dB(A)    | 52                   |
|              | m³/s     | 0,013                |
|              | Pa       | 0                    |
|              | W/(m³/h) | 0,42                 |
|              | %        | 4,00                 |
|              | %        | 26 / 26              |
|              | m³/h     | 1,80                 |