



ENERG  
енергия · ενεργεια



tecalor

LTM TL 200-50 KL



48  
dB



50 m<sup>3</sup>/h



Технические характеристики изделия:

|              |           | LTM TL 200-50 KL     |
|--------------|-----------|----------------------|
|              |           | 190717               |
| Manufacturer |           | tecalor              |
|              | kWh/(m²a) | -87,86               |
|              | kWh/(m²a) | -43,91               |
|              | kWh/(m²a) | -18,74               |
|              |           | A+                   |
|              |           | A+                   |
|              |           | E                    |
|              |           | WLA, Zwei Richtungen |
|              |           | Drehzahl geregelt    |
|              |           | Regenerativ          |
|              | %         | 86,6                 |
|              | m³/h      | 50                   |
|              | W         | 12                   |
|              | dB(A)     | 48                   |
|              | m³/s      | 0,014                |
|              | Pa        | 50                   |
|              | W/(m³/h)  | 0,14                 |
|              |           | 0,65                 |
|              | %         | 39 / 39              |
|              | m³/h      | 0,20                 |
|              | kWh/a     | 82                   |
|              | kWh/a     | 82                   |
|              | kWh/a     | 82                   |
|              | kWh/a     | 8990                 |
|              | kWh/a     | 4595                 |
|              | kWh/a     | 2078                 |



**ENERG** Y IJA  
енергия · ενεργεια IE IA

**tecalor**

LTM TL 200-50 KL



48  
dB

50 m<sup>3</sup>/h

Технические характеристики изделия:


|              |           | LTM TL 200-50 KL     |
|--------------|-----------|----------------------|
|              |           | 190717               |
| Manufacturer |           | tecalor              |
|              | kWh/(m²a) | -84,57               |
|              | kWh/(m²a) | -41,53               |
|              | kWh/(m²a) | -16,87               |
|              |           | A+                   |
|              |           | A                    |
|              |           | E                    |
|              |           | WLA, Zwei Richtungen |
|              |           | Drehzahl geregelt    |
|              |           | Regenerativ          |
|              | %         | 86,6                 |
|              | m³/h      | 50                   |
|              | W         | 12                   |
|              | dB(A)     | 48                   |
|              | m³/s      | 0,014                |
|              | Pa        | 50                   |
|              | W/(m³/h)  | 0,14                 |
|              |           | 0,85                 |
|              | %         | 39 / 39              |
|              | m³/h      | 0,20                 |
|              | kWh/a     | 139                  |
|              | kWh/a     | 139                  |
|              | kWh/a     | 139                  |
|              | kWh/a     | 8806                 |
|              | kWh/a     | 4501                 |
|              | kWh/a     | 2035                 |



**ENERG** Y IJA  
енергия · ενεργεια IE IA

**tecalor**

LTM TL 200-50 KL

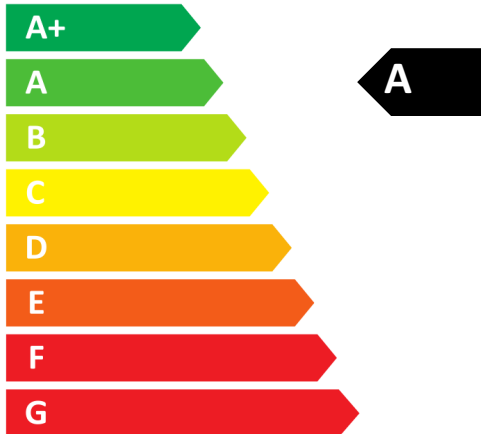

48  
dB

50 m<sup>3</sup>/h

Технические характеристики изделия:


|              |           | LTM TL 200-50 KL     |
|--------------|-----------|----------------------|
|              |           | 190717               |
| Manufacturer |           | tecalor              |
|              | kWh/(m²a) | -82,79               |
|              | kWh/(m²a) | -40,19               |
|              | kWh/(m²a) | -15,79               |
|              |           | A+                   |
|              |           | A                    |
|              |           | E                    |
|              |           | WLA, Zwei Richtungen |
|              |           | Drehzahl geregelt    |
|              |           | Regenerativ          |
|              | %         | 86,6                 |
|              | m³/h      | 50                   |
|              | W         | 12                   |
|              | dB(A)     | 48                   |
|              | m³/s      | 0,014                |
|              | Pa        | 50                   |
|              | W/(m³/h)  | 0,14                 |
|              |           | 0,95                 |
|              | %         | 39 / 39              |
|              | m³/h      | 0,20                 |
|              | kWh/a     | 174                  |
|              | kWh/a     | 174                  |
|              | kWh/a     | 174                  |
|              | kWh/a     | 8714                 |
|              | kWh/a     | 4454                 |
|              | kWh/a     | 2014                 |



**ENERG** Y IJA  
енергия · ενεργεια IE IA

**tecalor**

LTM TL 200-50 KL

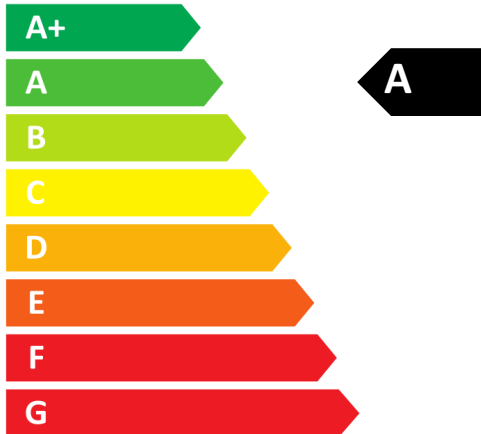

48  
dB

50 m<sup>3</sup>/h

Технические характеристики изделия:

|              |           | LTM TL 200-50 KL     |
|--------------|-----------|----------------------|
|              |           | 190717               |
| Manufacturer |           | tecalor              |
|              | kWh/(m²a) | -81,86               |
|              | kWh/(m²a) | -39,49               |
|              | kWh/(m²a) | -15,21               |
|              |           | A+                   |
|              |           | A                    |
|              |           | E                    |
|              |           | WLA, Zwei Richtungen |
|              |           | Drehzahl geregelt    |
|              |           | Regenerativ          |
|              | %         | 86,6                 |
|              | m³/h      | 50                   |
|              | W         | 12                   |
|              | dB(A)     | 48                   |
|              | m³/s      | 0,014                |
|              | Pa        | 50                   |
|              | W/(m³/h)  | 0,14                 |
|              |           | 1,00                 |
|              | %         | 39 / 39              |
|              | m³/h      | 0,20                 |
|              | kWh/a     | 193                  |
|              | kWh/a     | 193                  |
|              | kWh/a     | 193                  |
|              | kWh/a     | 8668                 |
|              | kWh/a     | 4431                 |
|              | kWh/a     | 2004                 |